


PROPREFIL

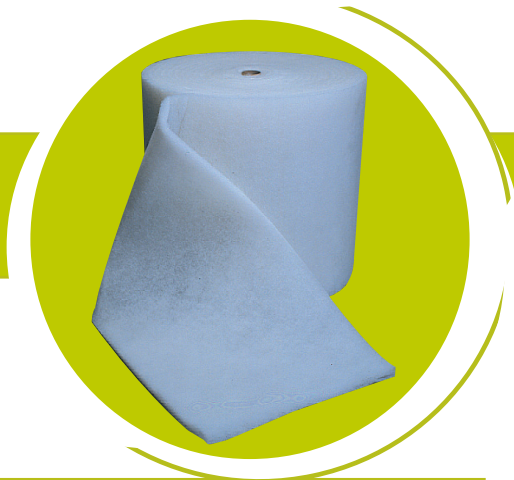

Medium efficiency filter media for tunnel and spray booth.

The PROPREFIL filter is used for pre-filtration before the plenum for paint spray booths. Its role is to retain impurities present in the atmosphere, before penetrating into the hot air generator. PROPREFIL is used as an air-conditioning filter in clean rooms or for NC laser machines. The PROPREFIL filter is made from progressive density acrylic fibres.

Advantages

Protection

Used for pre-filtering, our PROPREFIL filters capture the large particles. This significantly increases the operating life of our high efficiency filters; indeed these filters will accumulate less dirt.

Guaranteed results

Combined with the PROTRAM filter, the PROPREFIL filter offers extremely fine filtration for automobile and industrial paint, to provide a result that is in line with your needs.

Packaging

FORMAT	WEIGHT / M ²	N° ROLLS / PALLET
1,00 X 20m 39,37" X 65,6'	290g 0,64lbs	8
2,00 X 20m 78,74" X 65,6'	290g 0,64lbs	4

Characteristics

Depth	20 mm
Frontal speed m/s	1,5 M/S
Weight m ²	290 g
Initial load loss	23 PA at 1,5 M/S
Final load loss	250 PA at 1,5 M/S
Grauimetric efficiency	87 %
Classification EN 779	G3
Retention capacity	550 gr/m ²
Max. Temperature	+100°C
Fire Classification	M1
Colour	Blanc

Discover some product pictures.

INTERNATIONAL



PROFIL – ZI Kermelin Nord – 56890 Saint-Rué – France



Tel : 00 33 (0) 2 97606833 – Fax : 00 33 (0) 2 97445245



www.profil.net – contact@profil.net