

PROTECPEL AQ



Removable varnish in aqueous phase for all surfaces.

PROTECPEL AQ is a white impermeable coating to protect metals, plastics, porcelain... that can be easily removed from any surface


It can be used :

- To protect paint spray booth walls against paint or varnish stains
- To protect mechanical parts against scratches, scrapes or rust caused by handling or machining operations (bending, stamping...)
- To prepare masks for subsequent painting or electroplating
- To replace paper packaging for the delivery of parts or other objects.

If spray booths or parts are galvanised or not treated, then PROTECPEL AQ should be applied.

Advantages

- Protects many surfaces
- Enhances spray booth brightness
- An eco-friendly product
- Easy to apply
- Highly flexible: Withstands stamping and folding
- Good chemical resistance
- Easily removed
- Withstands high temperatures

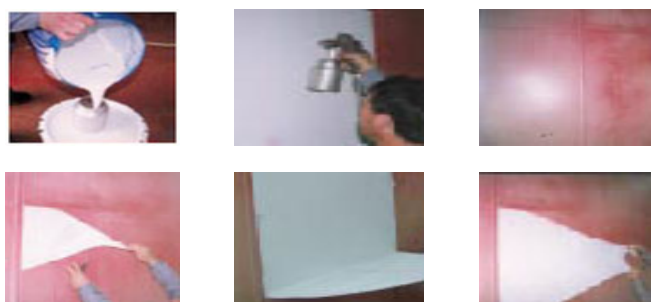

Packaging

Our PROTECPEL AQ varnish is delivered in 5 kg, 10 kg, and 30 kg containers.

Instructions for use

1. PROTECPEL AQ can be used in two ways :
 - ° Spray gun: A thick layer of varnish should be applied. Use a 0.5mm nozzle, the pot pressure must be between 4 and 6 kg/cm and the spray gun pressure between 4 and 6 kg/cm .
 - ° Soaking: Apply as is.

If necessary, apply with a brush to obtain a mask on small surfaces. Raised lettering, embellishments...

2. Air dry. At 20°C, this takes 8 to 10 hours.

Characteristics

APPEARANCE	Thick white opaque liquid
MASS VOLUME at 20°C	1.10 1.12 g/cm ³ (in accordance with NF T 60101)
VISCOSITY at 20°C	8-11 Poise EPPRECHT Uiscometer
FLASH POINT	Non flammable
DRY EXTRACT - 3hrs at 105° C	51 - 55 % NF. T 30013
TYPE OF FILM	White, flexible film
FILM THICKNESS	80 - 100 microns
THINNING AGENT	Water
RESISTANCE	Not sensitive to organic solvents and water
DRYING TIME	8 hours at 20°C in air